


Connection

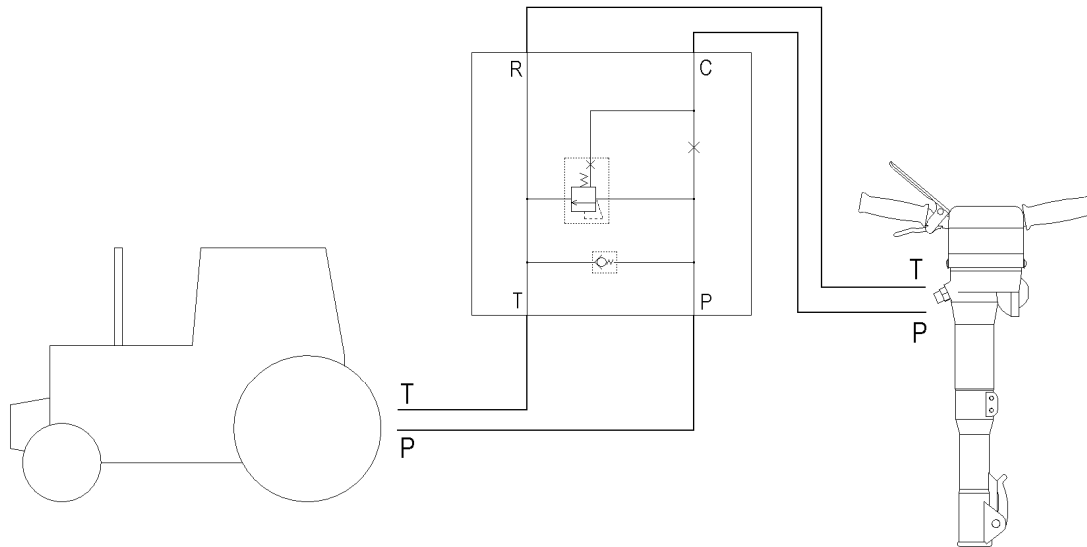

The oil flow divider can be connected to various power sources, like excavators, trucks, loaders, tractors etc. The oil flow divider reduces the flow from these machines so that they can be used as power source for the HYCON hydraulic tools, e.g. breakers.

If the oil flow divider is supplied with an oil flow much higher than used by the tool, the excessive oil will be transformed into heat. Therefore never let the power source run with higher oil flow (number of revolutions) than necessary.

Connect the port marked P on the flow divider to the power source feed line and the port marked T on the flow divider to the power source return line.

The tool can then be connected to the oil flow divider.